



DM 6600 F

Goose neck hands-Free Microphone

- > Goose neck microphone for hands-free operation in vehicles.
- > Available with 300 mm or 500 mm goose neck.
- > Mounting on steering column, dash board, window frame etc.



DESCRIPTION

- > Attractive design.
- > Uni-directional pattern.
- > High-sensitivity electret cartridge.
- > Voltage supply 9–15 VDC when connected as shown in the diagram below.
- > Supplied with 4 m cable terminated with a 3.5 mm plug.
- > Wind cap.

ORDERING DESIGNATIONS

TYPE NO.	GOOSE NECK LENGTH	PRODUCT NO.
DM 6600 F	300 mm	270000038
DM 6600 F-500	500 mm	270000113



SPECIFICATIONS


ELECTRICAL

MODEL	DM 6600 F-...
TYPE	Goose neck microphone
POLAR PATTERN	Uni-directional
IMPEDANCE	1 k Ω
FREQ. RESPONSE	Shown in diagram below
SENSITIVITY	-44 dB \pm 3 dB at 1 kHz rel. 1 V/Pa
CARTRIDGE TYPE	Electret
VOLTAGE SUPPLY	Biased from 9-15 VDC power supply via bias resistor. See diagram below
CURRENT CONSUMPTION	Approx. 0.5 mA


MECHANICAL

CABLE	4 m 1 wire with shield with 3.5 mm plug
COLOUR	Black
TEMP. RANGE	Operating : -25° C to + 55° C Storage : -40° C to + 55° C
MATERIALS	Brass, epoxy laquered. Impact-proof ABS
DIMENSIONS	
DM 6600 F	350 (L) x 14 (D) mm 13.7 x 0.5 in.
DM 6600 F-500	560 (L) x 14 (D) mm 22.0 x 0.5 in.
WEIGHT	
DM 6600 F	Approx. 100 g / 0.22 lb.
DM 6600 F-500	Approx. 125 g / 0.27 lb.

DIAGRAM

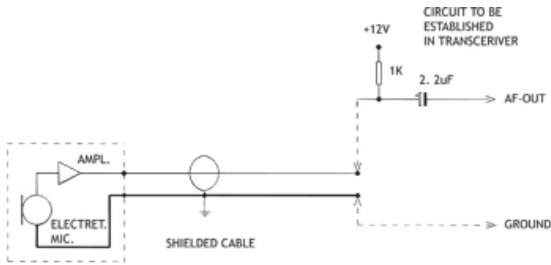

TYPICAL FREQUENCY RESPONSE DM 6600 F

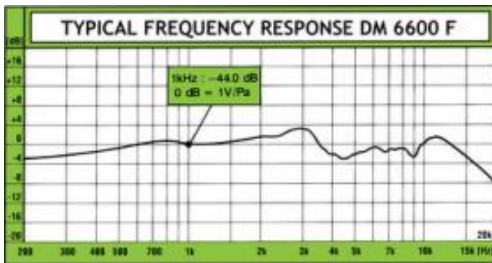

© PROCOM A/S -
DK-3600 Frederik